

BALL-FENCE Hand Rail System

Features:


Ρ

- Modular handrail system that includes stanchions in a range of configurations.
- Components are assembled on site or can be partially assembled in our factory and delivered to site in sections for simple fixing. (Charges apply).
- Components are all hot dip galvanised.
- Complies to AS 1657:2013.
- Suitable for indoor and outdoor use.
- Self closing gates available.

Material:	Post 48.3mm O.D. (40mm N.B.) Handrail 42.4mm O.D. (32 N.B.) Kneerail 33.7mm O.D. (25 N.B.)
Finish:	Hot dip galvanised.
Height:	1017mm ground to handrail centre. 560mm ground to kneerail centre.
Spacing:	Max post spacing 2 metres centre to centre.



This is an example of the type of corrosion that occurs when you don't use galvanised materials in extreme environments.

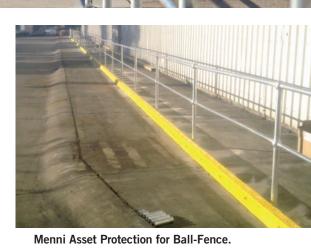




W-Beam Guard Fence for Ball-Fence.



Ball-Fence Gates.

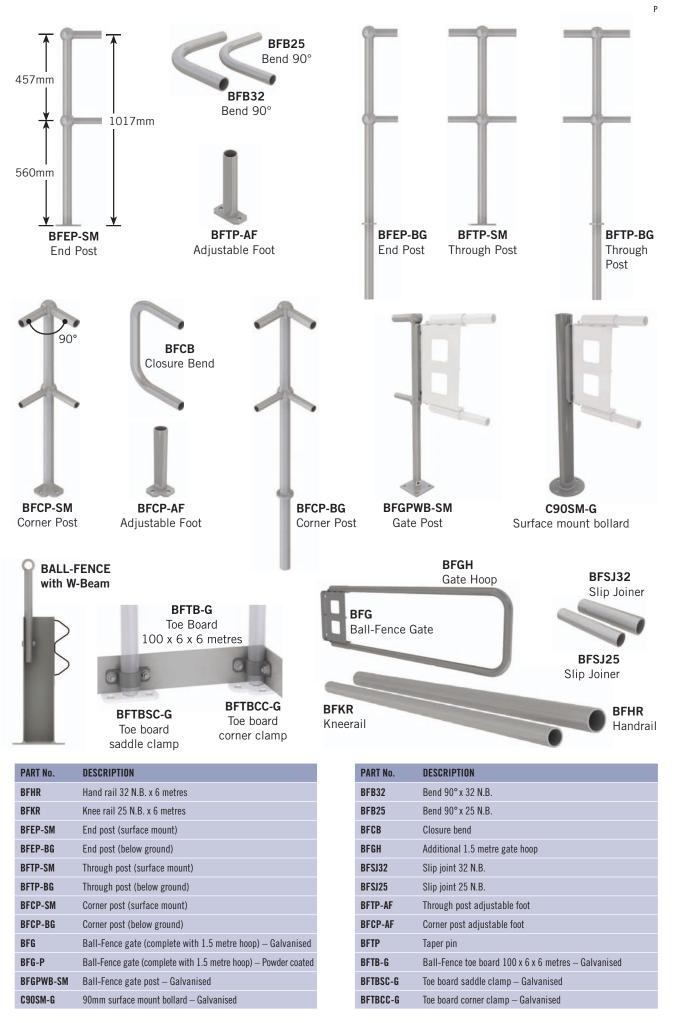

POST & RAIL SYSTEMS

Phone us or visit our website for more information!



BALL-FENCE GATE

Features:

- Self-closing operation.
- Compatible with Ball-Fence hand rail system.
- Supplied with 42.4mm diameter galvanised hoop.
- Can swing inward or outward.
- Can be used in pairs for wider openings.

Description:	Self-closing pedestrian gate.
Compatibility:	Ball-Fence hand rail system.
Material:	Mild steel.
Finish:	Hot dip galvanised or powder coated Yellow.
Operation:	Push open assisted closure.
Gate swing:	90 degrees.
Gate stop:	Built-in.
Opening:	Single gate 1.5 metres.
Max. open:	Double gates 3 metres.
Min. open:	No minimum.
Adjustment:	Cut down on site.
Height:	Top rail 1017mm above floor
Clearance:	Overhead clearance not applicable.
Mounting:	Existing posts, walls, optional posts available.
Weight:	18kgs gate assembly with 1.5 metre hoop.



U-BARS Double Rail

Features:

- Three sizes available in below ground or surface mount models.
- Heavy 3mm wall, 48.3mm diameter pipe.
- Fully welded one-piece construction.
- All models are galvanised and powder coated or galvanised only.
- Supplied ready for installation with no assembly required.

Material:	Steel pipe 48.3mm diameter, 3mm wall.
Finish:	Galvanised and powder coated or galvanised only.
Height:	Above ground 1040mm. Below ground 300mm.
Width:	1000, 1500 or 2000mm.
Weight:	UBD100 models 16kgs (approx.) UBD150 models 19.5kgs (approx.) UBD200 models 23.5kgs (approx.)
Installation:	Surface mount models base plate 150 x 75 x 10mm. Below ground models come with welded concrete starter bars.
Fixings:	Supplied with surface mount models.

PART No.	DESCRIPTION
UBD100SM	U-Bar double rail 1 metre surface mount – Gal. & powder coat
UBD100SM-G	U-Bar double rail 1 metre surface mount – Galvanised
UBD100BG	U-Bar double rail 1 metre below ground – Gal. & powder coat
UBD100BG-G	U-Bar double rail 1 metre below ground – Galvanised
UBD150SM	U-Bar double rail 1.5 metre surface mount – Gal. & powder coat
UBD150SM-G	U-Bar double rail 1.5 metre surface mount – Galvanised
UBD150BG	U-Bar double rail 1.5 metre below ground – Gal. & powder coat
UBD150BG-G	U-Bar double rail 1.5 metre below ground – Galvanised
UBD200SM	U-Bar double rail 2 metre surface mount – Gal. & powder coat
UBD200SM-G	U-Bar double rail 2 metre surface mount – Galvanised
UBD200BG	U-Bar double rail 2 metre below ground – Gal. & pPowder coat
UBD200BG-G	U-Bar double rail 2 metre below ground – Galvanised

PART No.	DESCRIPTION
BFG	Ball-Fence gate with hoop – Galvanised
BFG-P	Ball-Fence gate with hoop – Galvanised & powder coated
KIT23	Gate to post fixing kit – Up to 63mm diameter posts
KIT24	Gate to post fixing kit – Up to 90mm diameter posts
C90SM	90mm surface mount bollard for mounting Ball-Fence
BFGPWB-SM	Ball-Fence gate post – 48 x 1017mm
BFGH	Additional 1.5 metre gate hoop

Pedestrian & Workplace Safety Solutions