


## SUPERIOR WHEEL STOP

Our unique manufacturing process ensures they are not **“too bendy”** like competitor products, thus preventing damage from breaking at the fixing points. Designed with safety reflective yellow chevrons they can be fixed to concrete using mechanical fastenings or for asphalt/bitumen over base course using our asphalt fastening spikes. Ideal for at grade car parks, multi-level car parks, shopping centres etc. where safety is a concern and to provide orderly parking.

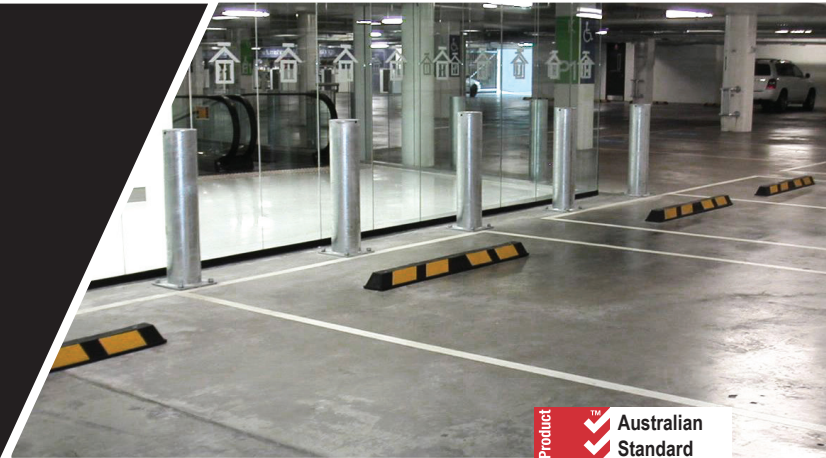

### Features

- Manufactured from recycled plastic
- Features 8 x highly reflective Yellow chevrons fixed in place with an epoxy adhesive
- Flexible enough to contour to the ground level, unlike hard extrusion moulded Wheel Stops
- Clean Pre-drilled 14mm fixing holes for ease of installation
- Comes with a three year warranty

### Fastening Options

- Easy installation of wheel stop to concrete surfaces with concrete fastenings, or 300mm Road Spikes for installation of wheel stop on asphalt/bitumen surfaces over base-course



### RECYCLED PLASTIC WHEEL STOPS

PRODUCT CODE	LENGTH	WIDTH	HEIGHT	WEIGHT	FIXING
RON-VPWS	1650mm	160mm	100mm	13kg	For fixing to concrete use 3 x M12 x 150mm Screw Bolts or our heavier M16 x 145mm Sleeve Anchor For asphalt/bitumen use 3 x M12 x 300mm

PRODUCT CODE	LENGTH	DIAMETER	FINISH	DESCRIPTION
FIX-STCB12X150	145mm	16mm	Zinc Yellow	Sleeve Anchor M16 x 145mm Z/Y for fixing to concrete
NP-GS-ZC	300mm	12mm	Electro Galvanised	Road Spike M12 x 300mm for asphalt/bitumen surfaces over base course
NP-GS-HDG	300mm	12mm	Spun Galvanised	Road Spike M12 x 300mm for asphalt/bitumen surfaces over base course